



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 251 450 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
23.10.2002 Bulletin 2002/43

(51) Int Cl.⁷: G06K 7/00

(21) Application number: 02252460.7

(22) Date of filing: 05.04.2002

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Goodwin, John C., III
Suwanee, Georgia 30024 (US)

(74) Representative: Williamson, Brian et al
International IP Department,
NCR Limited,
206 Marylebone Road
London NW1 6LY (GB)

(30) Priority: 09.04.2001 US 829177


(71) Applicant: NCR INTERNATIONAL INC.
Dayton, Ohio 45479 (US)

(54) Item processing device with barcode reader and intergrated RFID interrogator

(57) An item processing device which process both barcode and radio frequency identification (RFID) la-

bels. The item processing device includes a barcode reader and a radio frequency product label interrogator coupled to the barcode reader.

FIG. 1

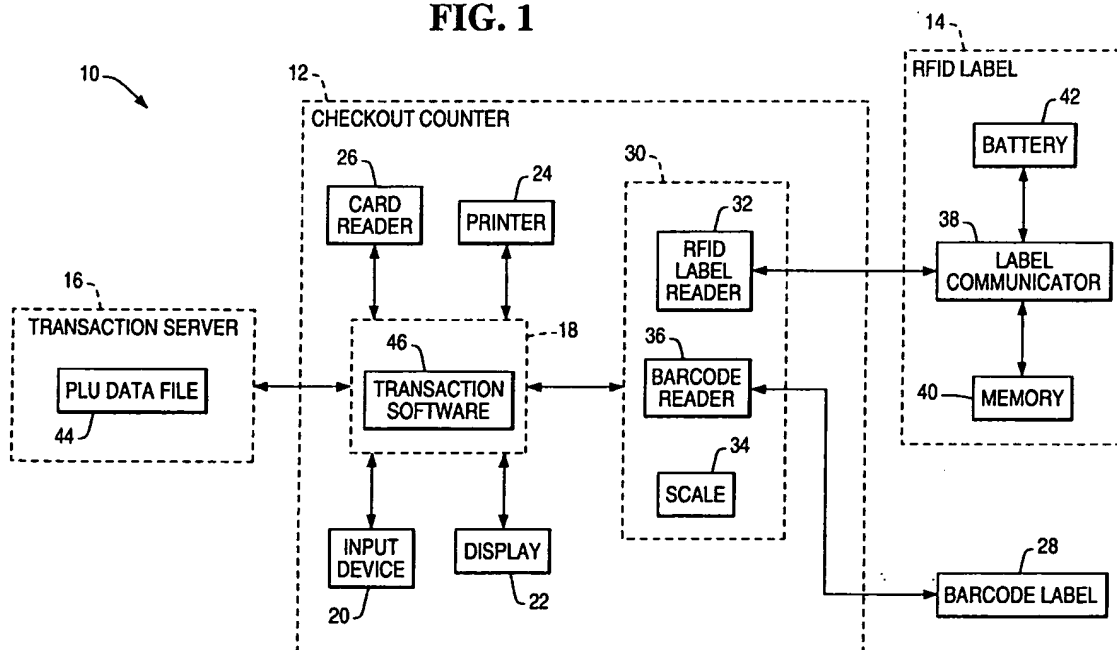

Best Available Copy

EP 1 251 450 A1

Description

[0001] The present invention relates to checkout systems in supermarkets and other retail establishments, and more specifically to an item processing device including a barcode reader and integrated RFID interrogator.

[0002] Checkout systems typically include barcode readers. Today, nearly all products are labelled with barcodes, either by the manufacturers or the retailers of such products.

[0003] Barcode readers come in various types for various purposes. The most common scanners are optical barcode readers which include lasers and mirrors for generating a scan pattern. Some are mounted in checkout counters, while others are portable and hand-held. An example barcode reader is disclosed in U.S. Patent No. 5,229,588.

[0004] Some items would not be identifiable and recordable by a barcode reader, if they were labelled with Radio Frequency Identification (RFID) labels rather than barcode labels. RFID technology provides an alternative to bar code reader technology for distinguishing and recording items for purchase. Some of the uses of RFID technology are disclosed in U.S. Patent No. 6,019,394.

[0005] It would be desirable to combine an RFID interrogator with a bar code reader into a single item processing peripheral in order to maintain operator focus for item entry on a single area of a checkout counter, the area where the bar code reader is located.

[0006] According to a first aspect of the present invention there is provided an item processing device comprising:

- a barcode reader; and
- a radio frequency product label interrogator coupled to the barcode reader.

[0007] According to a second aspect of the present invention there is provided an item checkout device comprising

- a barcode reader including

- control circuitry for obtaining first identification information from barcode labels; and
- a communication port coupled to the control circuitry for obtaining second identification information from a radio frequency product label; and

- a radio frequency interrogator which provides the second identification information to the communication port.

[0008] According to a third aspect of the present invention there is provided an item processing method comprising the steps of:

- activating an item processing device including a barcode reader to obtain first identification information from an item and a radio frequency product label interrogator to obtain second identification information from the item;

- if the item has a barcode label, obtaining the first identification information by the barcode reader; and

- if the item has a radio frequency product label, obtaining the second identification information by the radio frequency product label interrogator.

[0009] An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Fig. 1 is a block diagram of a transaction system with RFID capability;

Fig. 2 is a block diagram of a barcode reader of the present invention; and

Fig. 3 is a flow diagram illustrating the operation of the checkout apparatus.

[0010] Referring to Fig. 1, transaction system 10 primarily includes checkout counter 12 and transaction server 16.

[0011] Checkout counter 12 includes terminal 18, input device 20, display 22, printer 24, card reader 26, and label reader 30.

[0012] Terminal 18 controls operation of checkout counter 12 and executes transaction software 46.

[0013] Input device 20 records customer selections. Input device 20 may be a touch screen or keyboard.

[0014] Display 22 displays program instructions to assist the customer through a transaction. Display 22 may be a liquid crystal display and may be combined with input device 20 as a touch screen.

[0015] Printer 24 prints transaction information on receipt paper.

[0016] Card reader 26 reads information from customer payment and identification cards. Card reader 26 may include a magnetic stripe reader or smart card reader or combination of both.

[0017] Item checkout apparatus 30 reads RFID label 14 and barcode label 28. Item checkout apparatus 30 includes RFID label reader 32, scale 34, and barcode reader 46.

[0018] RFID label reader 32 reads identification information stored in RFID label 14.

[0019] Barcode reader 46 reads barcode label 28.

[0020] Scale 34 provides weight information for produce items and other random weight or bulk items.

[0021] RFID label 14 is an identification label. RFID label 14 may vary in size, depending upon product size, and may be visible or hidden when attached to a product. RFID label 14 may be removably or permanently attached to the product.

[0022] In one embodiment, RFID label 14 includes la-

bel communicator 38, RFID memory, and battery 42.

[0023] Label communicator 38 sends item identification information stored in RFID memory 40 to label reader 32. Label communicator 38 may include an RF transceiver.

[0024] Memory 40 stores item identification information and may include a read-only memory (ROM) for one-time use, or a programmable ROM (EPROM) for repeated use.

[0025] Battery 42 provides power to label communicator 38.

[0026] In another embodiment, RFID label 14 may be a passive label. Passive RFID labels use very little energy and may only include label communicator 38. Power may be derived from radio waves.

[0027] Label communicator 38 may include a reflective antenna which has a frequency which is unique among RFID labels 14. Label communicator 38 communicates RFID label identification information which must be cross-referenced to obtain item identification information from a table. Label communicator 38 may include a number of antennas, such as conductive ink antennas.

[0028] Transaction server 16 receives item identification information from terminal 18 and returns price information from price look-up data file 44. Terminal 18 obtains item identification information from item checkout apparatus 30.

[0029] Turning now to Fig. 2, item checkout apparatus 30 is illustrated in detail.

[0030] RFID label reader 32 is preferably located inside housing 48 of barcode reader 46, but may also be affixed to the outside of the housing 48 as well. RFID label reader 32 includes label interrogator 64, antenna 66, and control circuitry 68.

[0031] Label interrogator 64 interrogates RFID label 14 to obtain identification information. Label interrogator 64 may include an RF transceiver. Label interrogator 64 uses antenna 66.

[0032] Control circuitry 68 controls operation of RFID label reader 32 and provides identification information to terminal 18 through barcode reader 46. Control circuitry 68 may include commonly available circuitry for sensing the presence of an item. Control circuitry 60 may also wakeup certain components, such as laser 50, for operation.

[0033] Control circuitry 68 feeds identification information to control circuitry 60 through serial port 62, but may also feed identification information directly to terminal 18 without going through serial port 62 or control circuitry 60.

[0034] An example barcode reader 46 primarily includes laser 50, optical transceiver 52, polygon spinner 54, pattern mirrors 56, photodetector 58, and control circuitry 60. However, other types of barcode readers, including portable or hand-held barcode readers, are envisioned as well.

[0035] Laser 50 provides a laser beam. The laser

beam passes through optical transceiver 52, which includes a mirrored collecting surface and an aperture for passing the laser beam.

[0036] Polygon spinner 54 includes mirrored facets which directing the laser beam at pattern mirrors 56. Pattern mirrors 56 direct the laser beam to produce a plurality of scan lines.

[0037] Light reflected from barcode label 28 is directed by pattern mirrors 56 to polygon spinner 54, which directs the light to optical transceiver 52. The collecting surface of optical transceiver 52 directs the light to photodetector 58, which generates electrical signals representing the intensity of the reflected light.

[0038] Control circuitry 60 interprets the electrical signals to determine item identification information.

[0039] Control circuitry 60 optionally obtains item identification information or RFID label identification information from RFID label reader 32 through serial port 62. If configured this way, control circuitry 60 passes identification information from both barcode label 28 and RFID label 14 to terminal 18.

[0040] Referring now to Fig. 3, the operation of item checkout apparatus 30 is illustrated in detail beginning with START 90.

[0041] In step 92, item checkout apparatus 30 waits for an item present signal to read a label.

[0042] Control circuitry 60 within barcode reader 46 may generate the signal, if it is equipped with item sensing circuitry. In the configuration of Fig. 2, control circuitry 60 may alert control circuitry 68 through serial port 62. Regardless of configuration, transaction software 46 may provide the signal to both control circuitry 60 and 68 in response to operator input from input device 20.

[0043] In step 94, control circuitry 60 activates any inactive components in barcode reader 46 and scans the item for barcode label 28, and control circuitry 68 activates label interrogator 64 to seek RFID label 14.

[0044] In step 96, control circuitry 60 examines reflected light from the item for barcode information, and if control circuitry 60 senses barcode information, control circuitry 60 decodes the barcode information to obtain item identification information. Control circuitry 68 determines whether RFID label information has been received.

[0045] In step 98, one or both of control circuitry 60 and 68 send identification information to terminal 18. The identification information from both control circuitry 60 and 68 may be item identification information. Alternatively, control circuitry 68 may send RFID label identification information from which item identification information can be derived from a look-up table.

[0046] Transaction software 36 may compare item identification information derived from control circuitry 60 and 68 when both send it. Transaction software 36 sends a price request including the item identification information to transaction server 16. Operation returns to step 92 to await another signal.

[0047] Although the present invention has been de-

scribed with particular reference to certain preferred embodiments thereof, variations and modifications can be effected within the scope of the present invention.

Claims

1. An item processing device comprising:
 - a barcode reader; and
 - a radio frequency product label interrogator coupled to the barcode reader.
2. An item processing device as claimed in claim 1, wherein the barcode reader includes a housing; and the radio frequency product label interrogator is located within the housing.
3. An item processing device as recited in claim 2, further comprising:
 - a scale within said housing.
4. An item checkout device comprising
 - a barcode reader including
 - control circuitry for obtaining first identification information from barcode labels; and
 - a communication port coupled to the control circuitry for obtaining second identification information from a radio frequency product label; and
 - a radio frequency interrogator which provides the second identification information to the communication port.
5. An item processing method comprising the steps of:
 - activating an item processing device including a barcode reader to obtain first identification information from an item and a radio frequency product label interrogator to obtain second identification information from the item;
 - if the item has a barcode label, obtaining the first identification information by the barcode reader; and
 - if the item has a radio frequency product label, obtaining the second identification information by the radio frequency product label interrogator.
6. A method as claimed in claim 5, comprising the steps of:
 - sensing the item by the item processing device;
 - and
 - activating the barcode reader and the radio frequency product label interrogator in response to sensing the item by the item processing device.
7. A method as claimed in claim 5 or claim 6, comprising the step of:
 - if the item has both the barcode label and the radio frequency product label, identifying the item using both the first and second identification information.
8. A method as claimed in any of claims 5 to 7, further comprising the step of:
 - obtaining a price of the item if the first and second identification information are associated with the item.
9. A method as claimed in any of claims 5 to 8, further comprising the step of:
 - obtaining a price of the item using the first identification information if only the first identification information is obtained.
10. A method as claimed in any of claims 5 to 9, further comprising the step of:
 - obtaining a price of the item using the second identification information if only the first identification information is obtained.

FIG. 1

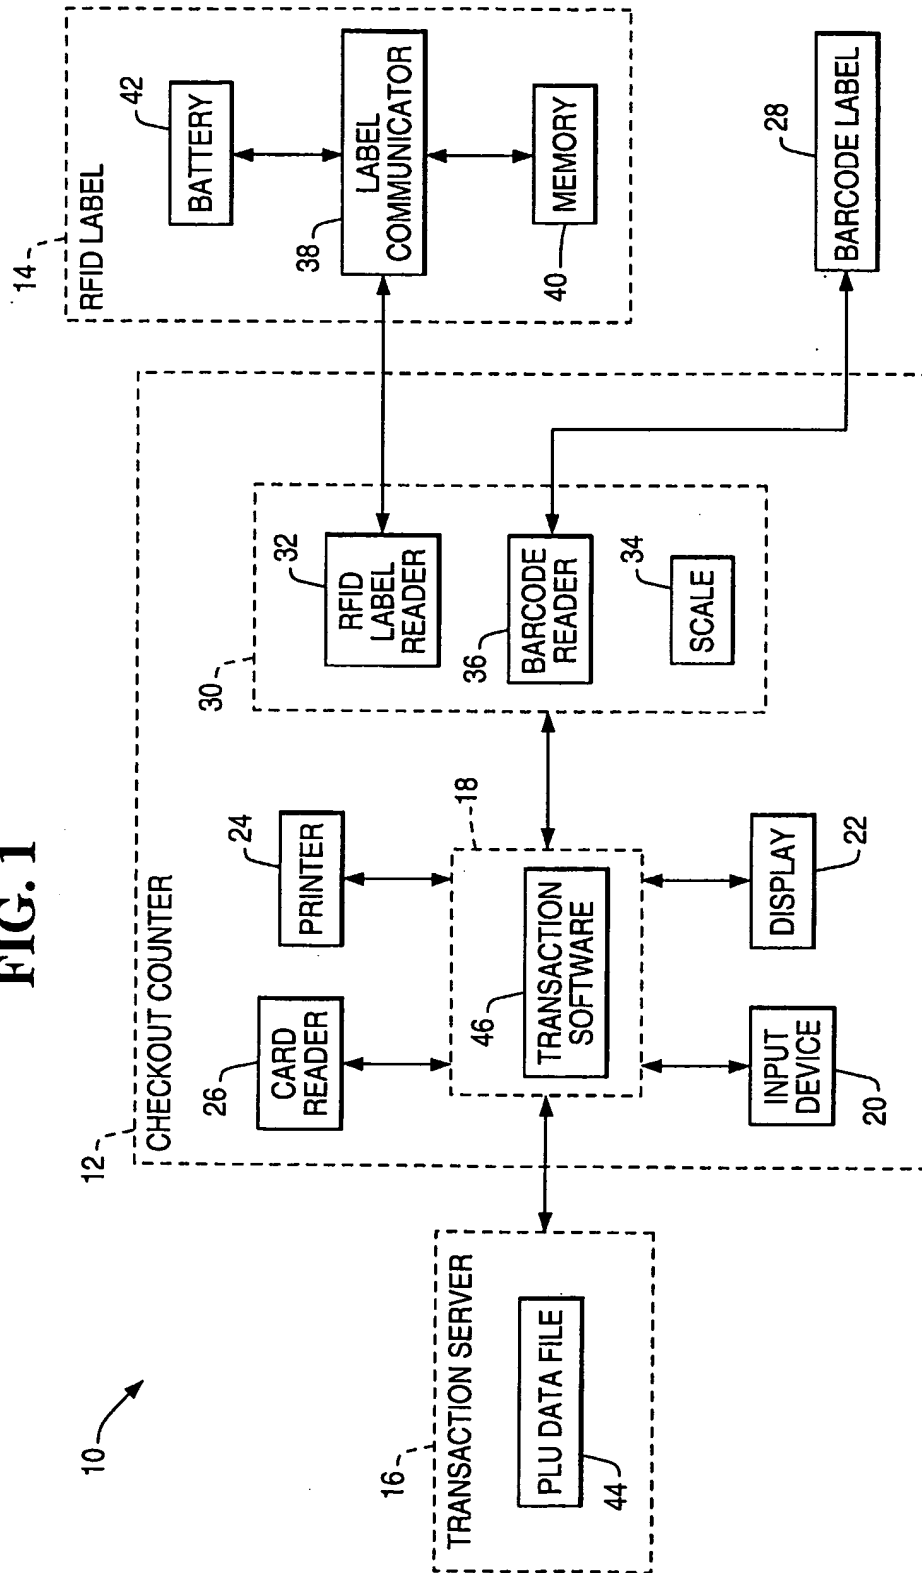


FIG. 2


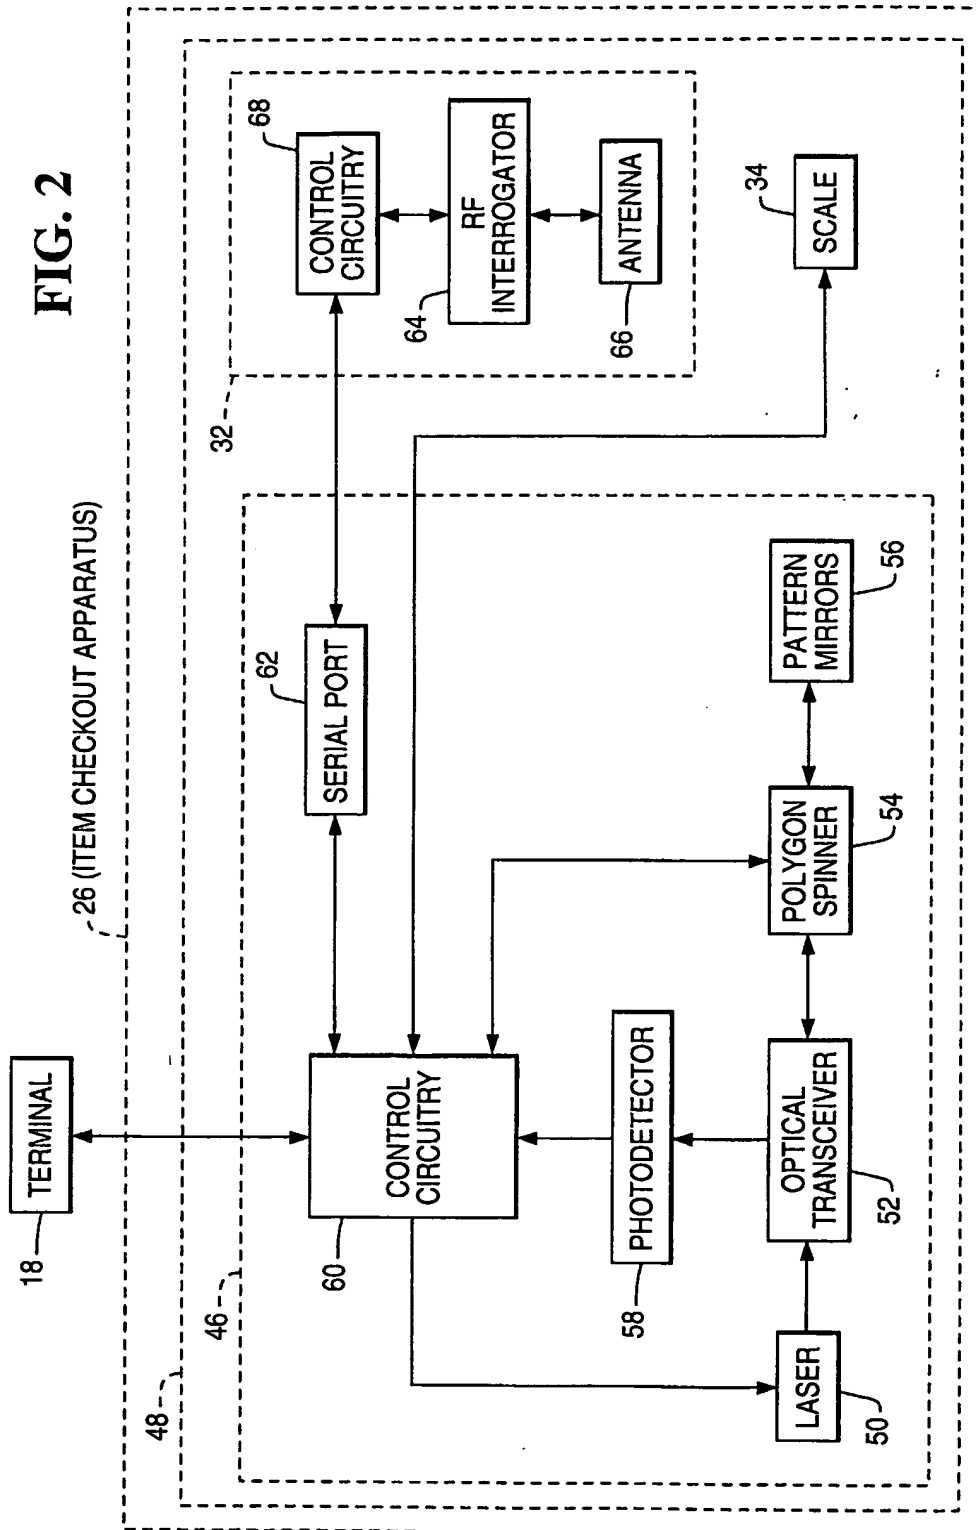


FIG. 3

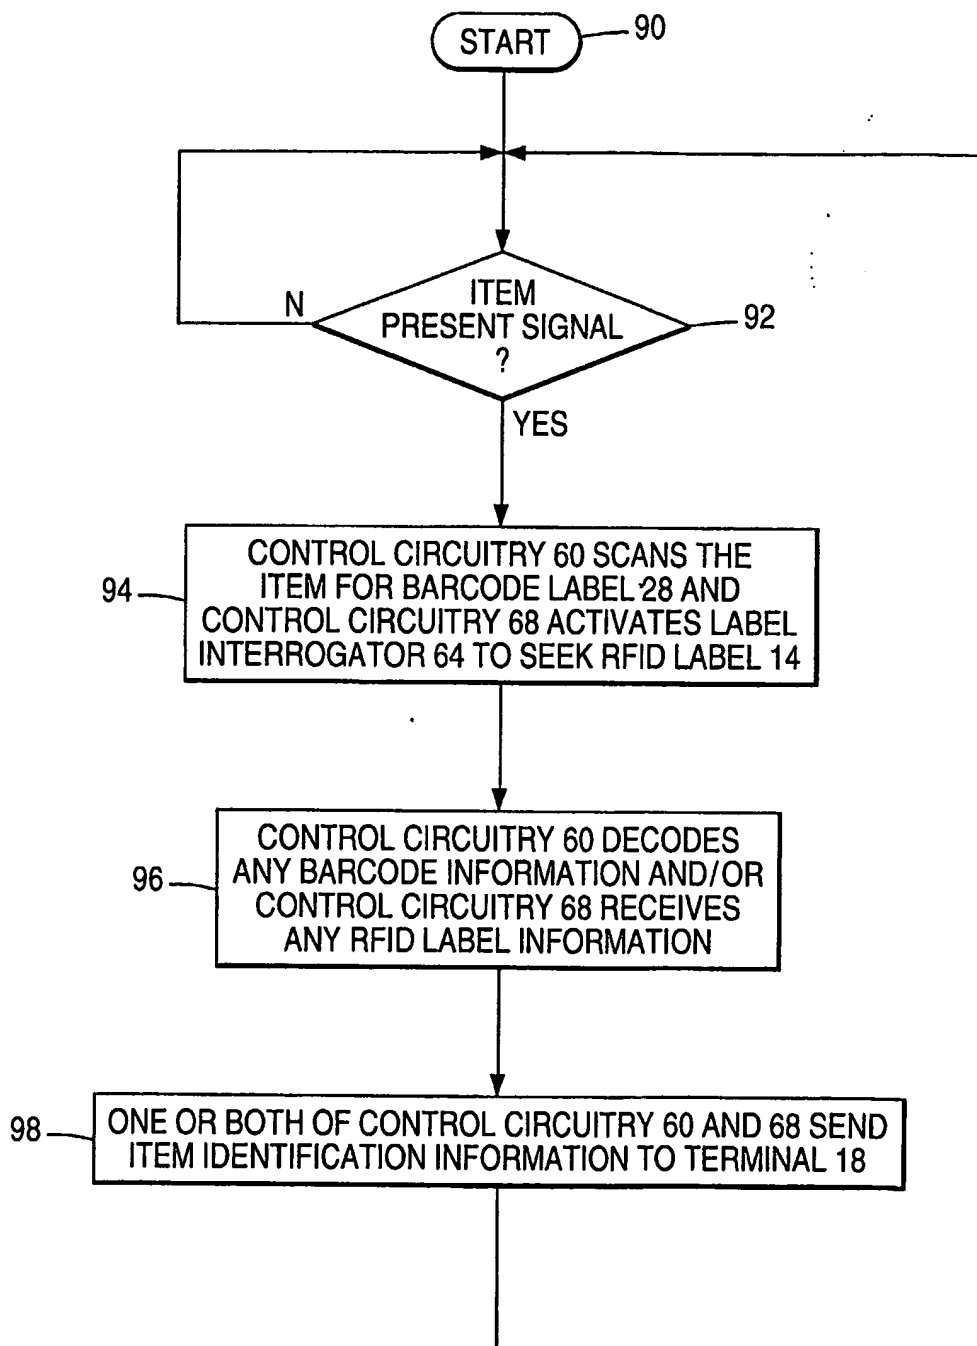

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 2460

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 6 195 053 B1 (ACKLEY H SPRAGUE ET AL) 27 February 2001 (2001-02-27) * column 3, line 4 - column 3, line 63 * * column 4, line 46 - column 6, line 37; figures 6,7 *	1,2,4	G06K7/00
Y	* column 4, line 46 - column 4, line 60 *	3	
Y	GB 2 284 083 A (HITACHI LTD ;HITACHI COMPUTER ENG (JP)) 24 May 1995 (1995-05-24) * page 16, line 8 - page 17, line 15 * * page 36, line 12 - page 36, line 27; figure 1A *	3	
X	US 5 703 347 A (SHEPARD PHILLIP W ET AL) 30 December 1997 (1997-12-30) * column 2, line 19 - column 2, line 26 * * column 9, line 29 - column 9, line 65 *	1,2	
X	US 5 382 784 A (EBERHARDT NOEL H) 17 January 1995 (1995-01-17) * column 2, line 43 - column 3, line 47 * * column 4, line 20 - column 5, line 15; figure 4 *	1,2,4	
X	PATENT ABSTRACTS OF JAPAN vol. 2000, no. 19, 5 June 2001 (2001-06-05) -& JP 2001 052105 A (TOHKEN CO LTD), 23 February 2001 (2001-02-23) * abstract; figures 1,2 *	1,2,5-7	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	US 5 992 570 A (HUTCHEON ALFRED J ET AL) 30 November 1999 (1999-11-30) * column 9, line 5 - column 12, line 35 * * column 13, line 33 - column 13, line 47 * * -/-	3	G06K A47F G07G
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 16 July 2002	Examiner Geiger, J-W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (3.82) (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 02 25 2460

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 640 002 A (AMES RONALD MERLE ET AL) 17 June 1997 (1997-06-17) * the whole document * -----	1-10	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 16 July 2002	Examiner Geiger, J-W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 2460

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-07-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6195053	B1	27-02-2001	NONE	
GB 2284083	A	24-05-1995	JP 7141553 A	02-06-1995
			JP 7192170 A	28-07-1995
			US 5543607 A	06-08-1996
US 5703347	A	30-12-1997	US 5563402 A	08-10-1996
			US 5347113 A	13-09-1994
			US 5330370 A	19-07-1994
			US 6293467 B1	25-09-2001
			US 5905249 A	18-05-1999
US 5382784	A	17-01-1995	AT 187269 T	15-12-1999
			AU 671007 B2	08-08-1996
			AU 6135194 A	29-08-1994
			DE 69421902 D1	05-01-2000
			DE 69421902 T2	20-07-2000
			EP 0682794 A1	22-11-1995
			JP 8506675 T	16-07-1996
			WO 9418642 A1	18-08-1994
JP 2001052105	A	23-02-2001	NONE	
US 5992570	A	30-11-1999	EP 0811958 A2	10-12-1997
			JP 10069574 A	10-03-1998
US 5640002	A	17-06-1997	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ ~~FADED~~ TEXT OR DRAWING
- ☒ ~~BLURRED~~ OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ ~~LINE~~S OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.